



Distribution Totes & Dollies


Stronger corner design means increased durability which translates to fewer damaged containers.

UPM-DC 2515-14

Secure plastic hinges make containers safer to handle and easier to recycle at end-of-life.

Enhanced nesting lug increases strength when stacking.

Distribution Container Specifications:

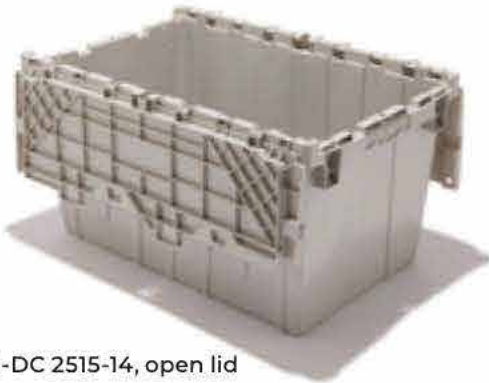

UPM-DC 2515-14, open lid



UPM-DC 2115-09

Distribution Dolly Specifications:



Model	Outside Dimensions (inches)				Inside Dimensions (inches)				Total Container Height (inches)	Product Clearance (inches)	Weight (lbs)	Volume (cubic feet)	Trailer Qty (53' trailer)
	Top L	Top W	Bottom L	Bottom W	Top L	Top W	Bottom L	Bottom W					
UPM-DC 2012-07 SP	19.6	11.6	17.1	9.3	17.7	9.9	16.5	8.7	7.3	6.2	3.1	0.5	7,200
UPM-DC 2115-09 SP	21.9	15.3	19.2	13.3	20.1	14.3	18.9	12.0	9.7	8.2	4.7	1.3	4,680
UPM-DC 2115-12 SP	21.9	15.2	18.9	12.7	19.7	14.0	18.0	12.2	12.8	11.0	5.4	1.7	3,840
UPM-DC 2115-12 HP	21.9	15.5	18.6	12.8	19.8	14.1	18.1	12.4	12.8	11.2	6.1	1.7	4,352
UPM-DC 2115-17 HP	21.9	15.2	18.6	13.0	20.1	14.3	18.4	12.8	17.2	15.8	7.7	2.3	3,456
UPM-DC 2213-12 SP	22.3	13.0	18.9	10.9	20.0	11.3	18.7	10.1	13.4	11.8	5.2	1.5	4,480
UPM-DC 2515-14 SP	25.3	16.3	22.0	13.3	23.3	14.5	21.6	12.8	13.9	12.2	7.2	2.2	2,600
UPM-DC 2717-12 SP	27.3	17.2	24.4	14.6	25.2	15.5	23.7	13.9	12.6	11.0	7.7	2.5	3,536
UPM-DC 2820-15 HP	28.1	20.8	25.8	18.8	26.0	19.0	25.0	18.0	15.6	14.0	13.2	3.8	1,320
Nestable Containers with Metal Hinge													
UPM-DC 1813-15 SM*	17.4	12.9	14.4	10.9	15.2	11.8	14.0	10.5	13.6	13.5	5.8	1.3	4,416
UPM-DC 1813-15 HM*	17.4	12.9	14.4	10.9	15.2	11.8	14.0	10.5	13.6	13.5	6.1	1.3	4,416
UPM-DC 2420-12 SM*	23.8	19.2	21.4	17.4	22.3	18.1	20.5	16.5	12.5	11.0	7.7	2.4	2,880
Dolly 2818 (for use with UPM-DC 2717-12, comes standard with 4" casters)	28.5	18.5	N/A	N/A	N/A	N/A	N/A	N/A	6.5	N/A	13.0	N/A	900
Dolly 2818 (for use with UPM-DC 2717-12, ships without casters)	28.5	18.5	N/A	N/A	N/A	N/A	N/A	N/A	6.5	N/A	5.0	N/A	1,716

Call 812-937-3605